

AllExpress **DOORNANNY Official Store** **968 Followers** **98.1% Positive Feedback** **968 Followers** **98.1% Positive Feedback** **968 Followers**

Store Home Products Sale Items Top Selling New Arrivals Feedback

Doornanny Wireless Transceiver Point Ethernet Port Bridge Kit Outdoor Connection Long-Range 1KM for SIP Camera Video Intercom

Recommended For

★ ★ ★ ★ ★ 5.0 - 2 Reviews 17 orders

US \$68.00 US \$92.14 **30%**
Instant discount: US \$1.00 off per US \$88.00 - **1% off, use DMHLOVEYOU** **Get coupons**

Ships from: **China** Russian Federation Spain Ukraine

Quantity: 1 9978 pieces available

Please select the country you want to ship from

Buy Now **Add to Cart** **76**

Free Return Return for any reason within 15 days

US \$68.00 US \$271.00 US \$193.00 US \$68.00

Doornanny Professional Security Intercom Manufacturer
The first video intercom manufacturer cooperate with Tuya

DOORNANNY Official Store

Top Brands 98.1% Positive Feedback 968 Followers Contact

US \$246.00 US \$32.99 US \$253.00 US \$170.00 US \$73.00 US \$193.00

OVERVIEW CUSTOMER REVIEWS (2) SPECIFICATIONS Report Item

Doornanny Wireless Transmitter

Wi-Fi Halow Network Bridge
DOORNANNY WIRELESS TRANSMITTER

Low power consumption Halow Wi-Fi Technology
1000M Max. 1000M Paired Use
Mini design 240*170*65mm

Model:871045
We suggest that it works with our 87-Series video intercom system.

Long Distance Transmit The Signal

Applicable Scene

Suitable for occasions where it is inconvenient to arrange network cables for long distance




- Composed of a transmitter and a receiver, 873045 can wirelessly transmit the signal.
- Support network bridge with 1Km max transmission distance in open space.
 - Support point-to-point connection.
 - Design for remote monitoring and video use with the SIP camera or SIP video intercom.
 - Plug and play, simple to build the connection.

Long Distance Transmit,Powerful Penetration

Omnidirectional Antenna design
With 1Km(3200ft) coverage



It Can cross 5 Walls Within 150M
One pair to work, part A is transmitter, part B is receiver

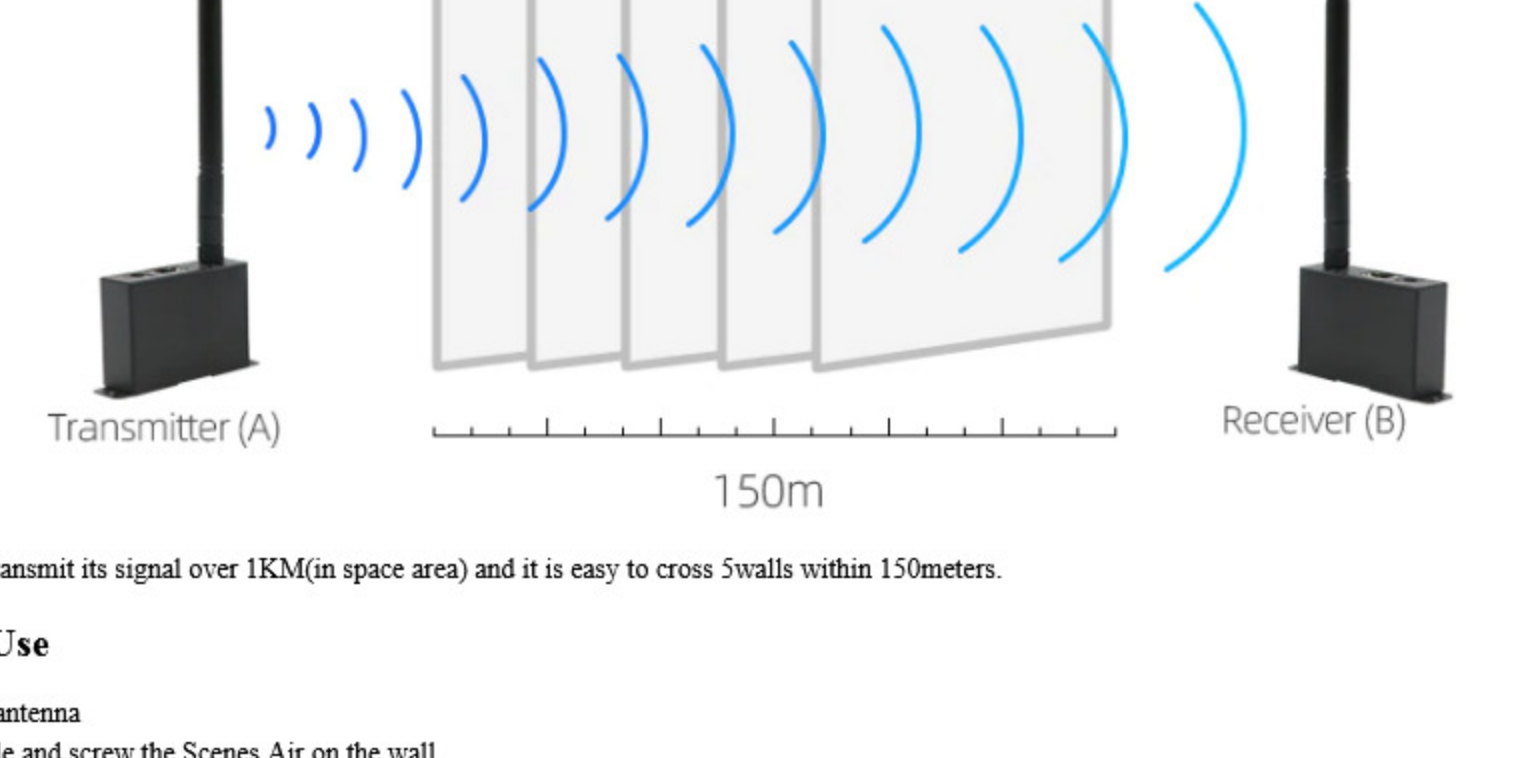

873045 can transmit its signal over 1KM(in open area) and it is easy to cross 5-walls within 150meters.


How To Use

- Plug in the antenna
- Drill the hole and screw the Scenes Air on the wall
- Plug in the power supply
- 1 pack connects to monitor while another pack connects to the doorbell, then the connection will be set up automatically.

Wiring Diagram Mode1:two IP devices connect with one pair Wireless Box directly



Mode2: IP Box connect with switch or router

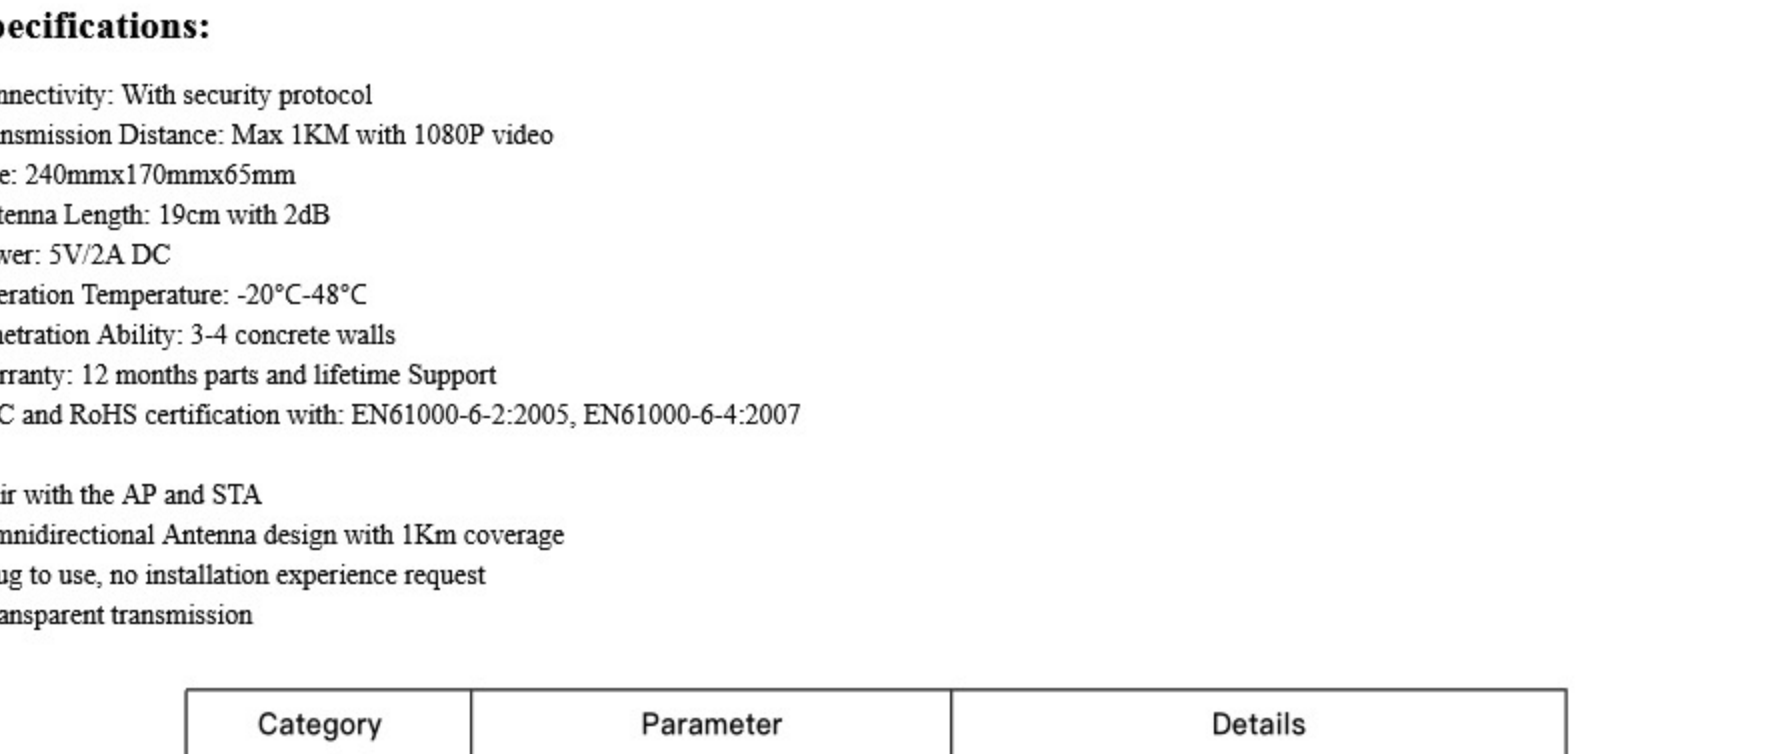

Specifications:

Connectivity: With security protocol
Transmission Distance: Max 1KM with 1080P video
Size: 240mm*170mm*65mm
Antenna Length: 19cm with 2dB
Power: 5V/2A DC
Operation Temperature: -20°C-48°C
Penetration Ability: 3-4 concrete walls
Warranty: 12 months parts and lifetime support
FCC and RoHS certification with: EN61000-6-2:2005, EN61000-4-4:2007

-Pair with the AP and STA
-Omnidirectional Antenna design with 1Km coverage
-Plug to use, no installation experience request
-Transparent transmission.

Category	Parameter	Details
Wireless features	Wireless Standards	IEEE 802.11ah (Wi-Fi Halow)
	Frequency Range *note1	*902MHz-930MHz/760-780MHz 1/2/4/8MHz automatic bandwidth adaptive*
	Transmission Power *note2	20dBm 100mW
	Modulation	BPSK, QPSK, QAM16 or QAM64
	Transmission Distance	Max. 9Km(3200ft) at MCS0
	Security Protocol	WPA2-PSK
	Encryption	AES
Hardware	Ethernet Port	10/100Mbps
	Power Supply	DC 5V/2A
	LED Indicate	*Power On/Off Link Status Signal Strength*
	Antenna Jack	SMA
Electronic	Power Supply	5.0V
	Max Current	500mA
	Working power	1.5 Watts Max
	Operating temperature	-20 °C ~ 70 °C
	Storage temperature	-20 °C ~ 80 °C
	Operating Humidity	10%-90% non-condensing
Antenna	spec	External 2dB omnidirectional Antenna
	Length	18cm
Structure	Gridout dimension	70x51x22mm(without Antenna)
	Giftbox dimension	240x170x65mm
	Item Weight	450g
Enclosure	Chassis material	Metel
	Color	Black

Note1: Available operating frequency may vary depending on the limitations of the countries or regions in which the device is used.
Note2: Maximum transmission power may vary across different channels depending on the limitations of the countries or regions in which the device is used.

Package Included:

Packing List



- 2x Wireless Bridge
- 2x Omnidirectional Antenna
- 2x Power Adapter
- 2x Ethernet Cable
- 4x Screws
- 1x User Manual

